

COLD DRINK DISPENSER #34





Internationally patented models






For all kinds of cold drink

Easy to use, the cold drink dispenser #34 allows you to dispense all types of cold drinks: fruit juices (with or without pulp), sangria, lemonade, water, iced tea. simply by pressing the glass or the jug against the tap.

Equipped with a stirring paddle, it allows to maintain a homogeneous temperature, while avoiding foaming and oxidation of the drink.

The wide air-cooling condenser allows a quick and reliable refrigeration, while its hermetically sealed compressor gives the guarantee of a high quality, efficient and long-lasting appliance.



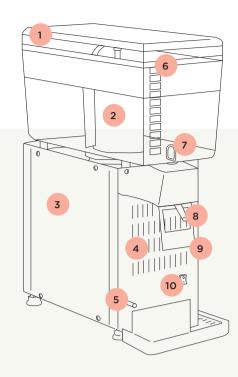

- 1 Removable bowl and cover Capacity: 12l (3 gallons)
- 2 Stirring paddle
- **3 Removable** stainless steel side panel
- 4 Air-cooling system with ventilation from the front to the rear


- 5 Condensation water recovery system
- 6 Level mark
- 7 Removable tap screw
- 8 Removable vertical spray tube
- 9 Removable push handle
- 10 Stirring paddle on/off switch

Choose your version





Reliable and performing refrigeration system Adjustable thermostat



- 1 Wide air-cooling condenser to continuously chill the drinks
- 2 Specific fan for better efficiency
- **3** High quality and long lasting hermetically sealed compressor




Safety, Standards, Hygiene

In accordance Machinery directive 2006/42/EC with the Electromagnetic compatibility following 2014/30/EU regulations "Low voltage" directive 2014/35/EU RoHS directive 2011/65/EU Regulation 1935/2004/EC (contact with food) Regulation 10/2011/EU (Plastic in contact with food) EN ISO 12100: 2010 Harmonized European EN 60204-1 + A1: 2009 **Standards** EN 60335-2-64: 2004 Commercial electric kitchen machines **CE Marking Electrical** Waterproof On/Off interlock switch (for stirring paddles) safety **Thermal** Overload protection integrated safety in compressor Hygiene All removable parts in contact with beverage are made of alimentary materials and are removable without any tool.

PRODUCT: 2-YEAR WARRANTY

MOTOR: 5-YEAR

Technical specifications



R134a Fluid charge

34-1: 60g 34-2: 139g 34-3: 200g

D: 540 mm (21")

H: 680 mm (27")

34,3 Kg (75 lbs)

Appliance 1 bowl

W: 190 mm (7,5") D: 430 mm (17") H: 545 mm (21") 15,6 Kg (34 lbs)

Shipping box

1 bowl W: 270 mm (11") D: 530 mm (21") H: 660 mm (26") 17,1 Kg (38 lbs)

Motor - 34-1 160W - 1/5 HP 100-120 V

60 Hz - CE 220-240 V 50/60 Hz - CE

2 bowls 3 bowls

W: 380 mm (15") W: 570 mm (22,5") D: 430 mm (17") D: 430 mm (17") H: 545 mm (21") H: 545 mm (21") 23,5 Kg (52 lbs) 30,5 Kg (71 lbs)


2 bowls 3 bowls W: 650 mm (26")

W: 460 mm (18") D: 535 mm (21") H: 660 mm (26") 25,4 Kg (55 lbs)

Motor - 34-2 Motor - 34-3

260W-1/3HP 330W - 3/7 HP 100-120 V 100-120 V 60 Hz - CE 60 Hz - CE 220-240 V 220-240 V 50/60 Hz - CE 50/60 Hz - CE



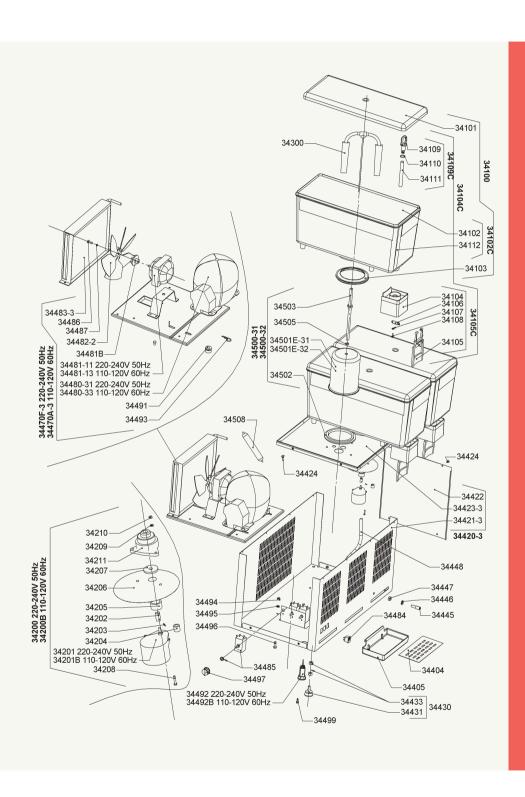



140-150 avenue Roger Salengro BP 80 067 69511 Vaulx-en-Velin Cedex (Lyon) FRANCE

Tél: +33 472 37 35 29 Fax: +33 478 26 58 21 Email: santos@santos.fr

www.santos.fr







