

# NW 608 XSafe

## Modular Ice Machine 315 kg

Item #:
Project:
Quantity:



### FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Stackable: add flexibility!
- Head only ice maker: requires a separate storage bin to collect the ice produced.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NW 608  
Dice 10 g  
W 22 x D 22 x H 22 mm



NW H 608  
Half Dice 6 g  
W 10 x D 22 x H 28 mm



NW L 608  
Large Dice 15 g  
W 28 x D 22 x H 28 mm

### CONDENSING SYSTEM

Air cooled  
Remote condenser  
Water cooled

### REFRIGERANT GAS

R404A  
R452A

### VOLTAGE V/Hz/ph

230/50/1  
230/60/1

### RECOMMENDED BINS

Head	Bins		kg
NW 608	✓	<b>SB393</b>	181
	✓	<b>SB530</b>	243
	CBT48EAMCD CBT48FMCD	<b>SB948</b>	406

#### LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)


Modular Ice Machine 315 kg

# NW 608 XSafe

## Modular Ice Machine 315 kg

Item #:
Project:
Quantity:

Modular Ice Machine 315 kg

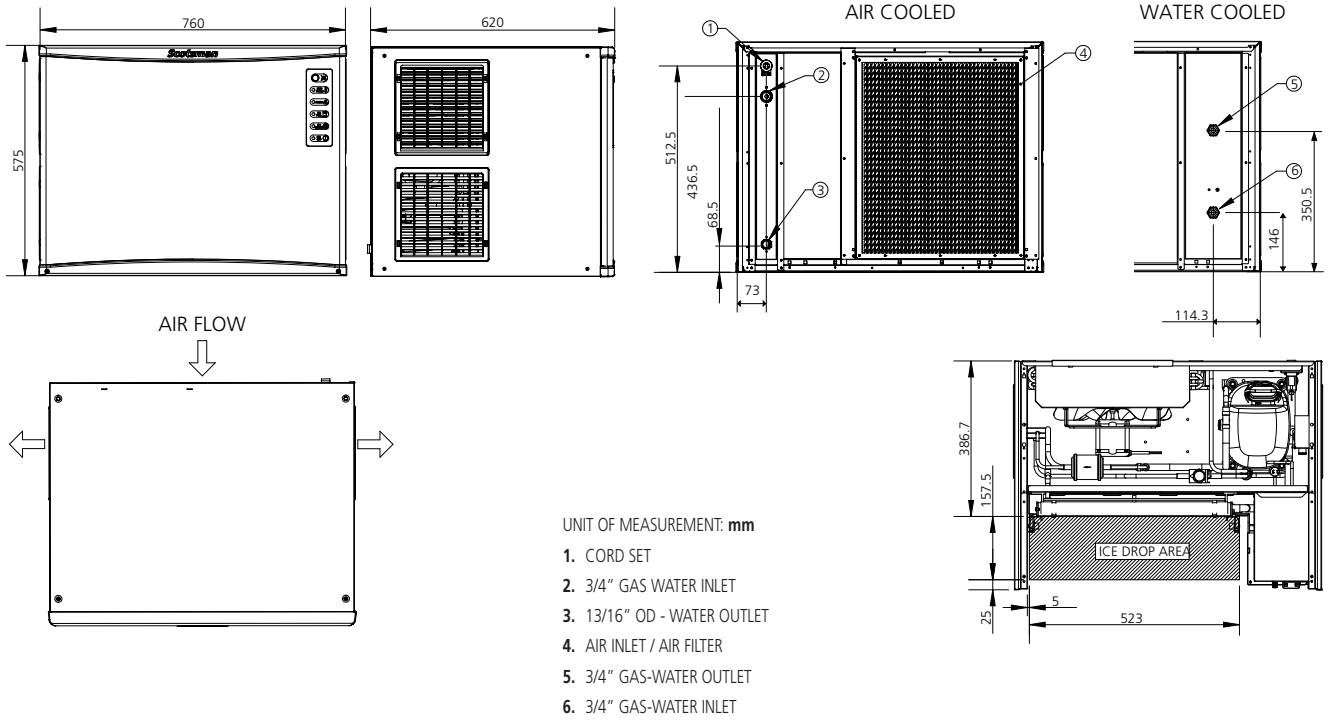

UNIT DATA		SHIPPING DATA		(*) Data refer to 32°C Amb. / 21°C Water temperature conditions									
Size (W x D x H)		760 x 620 x 575 mm		Carton (W x D x H)		830 x 690 x 770 mm							
Net weight		78 kg		Weight		92 kg							
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size		
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm <sup>2</sup>	A		
NWH 608 AS	230/50/1	320	290	225	15.0	33.7	16.5	1600	4850	3 x 1.5	16		
NWH 608 ASR	230/50/1									x			
NWH 608 WS	230/50/1	320	290	260	12.3	32.1	180.3	1600	4850	3 x 1.5	16		
NWL 608 AS	230/50/1	310	285	210	16.5	34.7	14.5	1600	4850	3 x 1.5	16		
NWL 608 WS	230/50/1	310	280	240	12.3	29.6	166.4	1600	4850	3 x 1.5	16		
NW 608 AS	230/50/1	315	290	230	15.9	36.5	15.8	1600	4850	3 x 1.5	16		
NW 608 ASR	230/50/1									x			
NW 608 WS	230/50/1	310	280	240	12.3	29.6	166.4	1600	4850	3 x 1.5	16		
NWH 608 AS	230/60/1							1600	4850	3 x 1.5	16		
NW 608 AS	230/60/1							1600	4850	3 x 1.5	16		